

SLIDE VALVES

Watertight (*pictured left*) and Fabricated (*pictured right*)



SLIDE VALVES


Watertight and Fabricated

WATERTIGHT SLIDE VALVES

DESCRIPTION

- **Material:** UPVC and see below
- **Size:** 1 1/4"-6" [DN32-DN150] 90-150 stocked
- Suits DWV or Stormwater Pipe
- **Working Pressure:** 0.35mpa
P&F Global advise these are best not used in pressure situations. (Please see pressure products – ball valves for these situations.)
- Widely used in aquaculture & irrigation
- PVC gate valves cannot be used in a chemical plant

No.	Parts	Material
1	Faucet	UPVC
2	Valve Gate	PP, 1Cr13
3	Seat	EPDM,NBR
4	Bolt	A2
5	Stem	1Cr13
6	Body	UPVC
7	Cap	UPVC
8	O-Ring	EPDM,NBR
9	Bushing	UPVC
10	Key	UPVC
11	Handle	ABS, ZL106

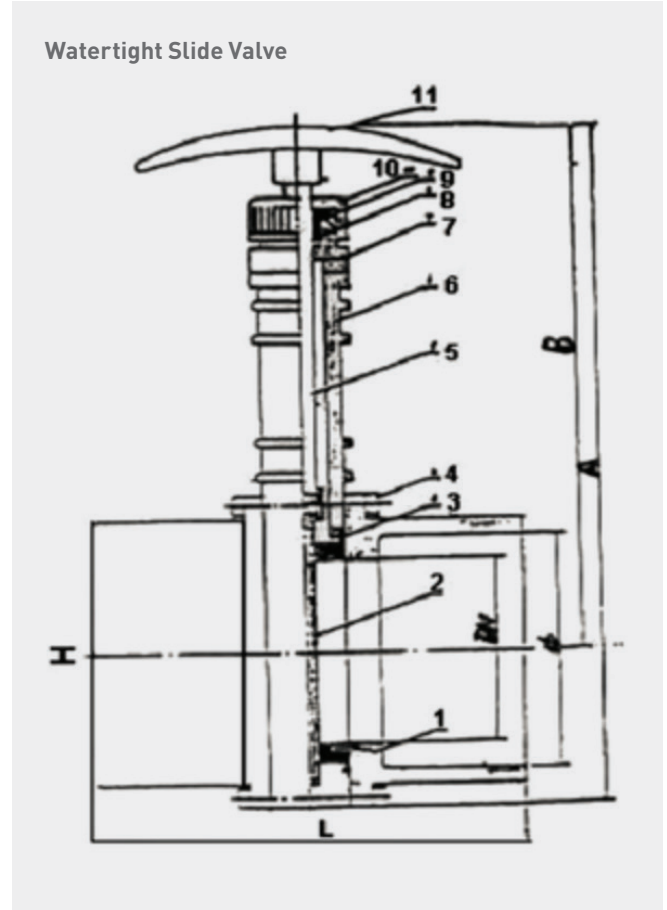

Watertight Slide Valves	
Size	Code
90mm	620-90
100mm	620-100
150mm	620-150

Size	A	B	DN	Ø	L	H	PN (Mpa)
90mm	305	222	80	90	128	150	0.35
100mm	350	260	100	110	132	170	0.35
150mm	505	380	150	160	172	242	0.35

FABRICATED SLIDE VALVES

DESCRIPTION

- **Material:** UPVC
- Size as noted, suits DWV or Stormwater pipe
- Blocks off main flow
- Handle easily extended if needed

Size	Code
100mm	600-100
150mm	600-150
175mm	600-175
225mm	600-225
300mm	600-300

Please note there is a known problem with the handles on the 150mm size snapping off at the connection to the blade if excessive force is applied.

SUPPLIER

